


热压和贴合设备专业制造商
Heat-pressing and lamination equipment manufacturer

JM-65SII

LCD cleaning machine
LCD端子清洗机



应用展示/Application Show:

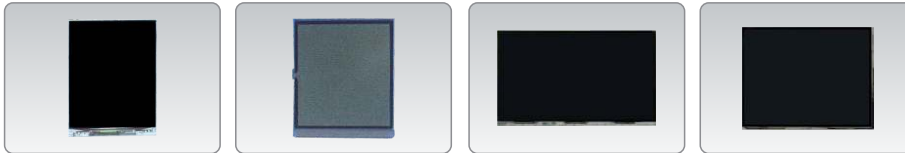

功能阐述:

JM-65SII LCD端子清洗机主要应用于LCD ITO绑定区域的擦拭及等离子清洗。设备自动完成LCD抓取、校正、布带擦拭及等离子清洗，清洗后LCD自动流入COG前段流水线。模具平台采用精密丝杆传动，保证平台移动的准确性和产品清洗效果。

Function elaborate:

JM-65SII LCD cleaning machine is mainly used in the wiping of LCD ITO bonding area and plasma cleaning. The equipment automatically conducts capture, correction, tape wiping and plasma cleaning on LCD. After cleaning, LCD automatically flows into the front production line of COG. Precision screw levels are used to drive mould platform to ensure the accuracy of platform movement and cleaning effect on products.

功能特点:

- ◎ 配备PLC和触摸屏系统，操作界面全中文，带用户密码保护功能
- ◎ 清洗机构采用伺服马达装置，确保设备稳定性
- ◎ 等离子清洗可设置所需速度和温度，保证产品清洗效果
- ◎ 擦拭布带采用伺服马达实现自动走料，可设定擦拭次数

Features:

- ◎ Equipped with PLC and touch screen system with Chinese operation interface and user password protection
- ◎ Servo motor used in cleaning mechanism to ensure the stability of equipment
- ◎ Desired speed and temperature can be set for plasma cleaning to ensure cleaning effect on products
- ◎ Tape cleaning driven by servo motor for automatic feeding with set cleaning times

JM-65SII

LCD cleaning machine
LCD端子清洗机



Cleaning speed
50~150
mm/s

Two-sided
cleaning

Max:
10.4"
X: 234mm
Y: 178mm

性能特徴:

- ◎ PLCとタッチパネル・中国語表示・パスワード付き
- ◎ 設備の安定性を保つため、洗浄機構にはサーボモータを採用する
- ◎ 製品の洗浄効果ため、プラズマ洗浄はスピードと温度の設定が可能
- ◎ サーボモータ制御で自動的に拭く、拭き回数が設定可能

기능 특징:

- ◎ PLC 및 터치 스크린 시스템을 조합하여 작업 인터페이스가 전문이며 사용자 비밀 번호 보호 기능이 있다
- ◎ 세척기 기구는 서보 모터 장치를 적용하여 설비의 온정성을 확보한다
- ◎ 플라즈마 청결은 필요한 속도와 온도를 설정할수있으며 제품 청결 효과를 확보한다
- ◎ 클린 마포 벨트는 서보 모터를 적용하여 자동으로 자재를 이동하며 클린 회수를 설정할 수 있다

产品规格:

电源	AC220V±10%, 50Hz, 2500W
操作环境	23℃±5℃, 40% to 95%, humidity with no Significant dust
工作气压	0.5~0.7Mpa (干燥气源)
擦拭次数	1~10次 (可设置)
清洗速度	50~150 mm/s (可设置)
等离子清洗距离	5~15 mm/s (可设置)

程序控制	PLC控制器+触摸屏
LCD	Min: 3" 65mm (X边) × 45mm (Y边)
	Max: 10.4" 234 (X边) × 178mm (Y边)
	Thic: 0.2mm~1.2mm
机身尺寸	1200(L)×950(W)×1800(H)mm
重量	Approx 300kg



深圳市集银科技有限公司
ShenZhen JiYin Technology Co.LTD
网址: Http://www.JiYin-Tech.com
E-mail: Sales@JiYin-Tech.com

深圳: 深圳市宝安区福永街道怀德南路翠岗工业园五区40栋
电话: (86) 0755-2991 9881
传真: (86) 0755-2991 9885
邮编: 518103

香港: 香港九龙观塘开源道64号源成中心607室
电话: 00852-3694 8066
传真: 00852-3694 8060

苏州: 苏州市南环西路大龙港新村10幢4-207室
电话: (86) 0512-6827 3416
传真: (86) 0512-6827 3417
邮编: 215002